



# AVT4000

US Patent 7,543,759

*Laboratories, Life Sciences, Healthcare*



## **Innovative features for the AVT4000!**

- Intuitive Graphical User Interface Dashboard
- Software Configurable
- BACnet® Available
- Bluetooth® Configuration Optional

## **Plus, these standard AccuValve features...**

- Exceptionally Low Pressure Drop
  - Design System Pressure – as low as 0.05" (12.5 Pa)
- True Airflow Feedback
- No Straight Run Requirements
- Linear Control Response
- High Accuracy and Turndown
- Can be Mounted in Any Position
- ASHRAE 90.1 Compliant – No Additional Hardware
- No Scheduled Maintenance
- Universal Voltage and Current Output
- 5-Year Manufacturer Warranty

Manufactured in the USA.



## The Accutrol AccuValve® AVT4000 represents the first truly new design in airflow control valves in decades.

The revolutionary design of the AccuValve created for sustainable critical environments maximizes turndown while maintaining exceptionally low pressure drop. The features and benefits of the AccuValve make it the choice of many of the world's most prestigious and demanding clients.

### Features & Benefits

The AVT4000 is designed for critical environment airflow control in laboratories, life science and healthcare facilities where precise airflow measurement and control is required. The AccuValve's ISO 9001:2015 certified, award winning design incorporates:

#### Exceptionally Low Pressure Drop

AccuValve's award winning design incorporates a streamlined compression section and a carefully designed static regain section. These features provide lower pressure drop, lower noise level and better flow measurement conditions than any other available technology.

#### True Airflow Measurement

The integral high accuracy vortex airflow sensing provides high turndown while maintaining accuracies of 5% of reading over the flow range, ensuring precise airflow control.

#### No Straight Run Requirements

There are no straight duct runs required before or after the valve, making application of the valve very simple. The air compression in the valve provides laminar airflow throughout the airflow range providing repeatable airflow measurement regardless of inlet or outlet conditions.

## ASHRAE Standard 90.1 Compliant without need for additional hardware

ASHRAE Standard 90.1 calls for the reset of the static pressure setpoint in VAV systems equipped with DDC controls. The AccuValve design allows the Building Automation System to provide this benefit to the owner without the requirement of any additional hardware or complexity. This is unique to the AccuValve for critical environments.

### Simple Layout and Installation

All parts of the AccuValve are accessible from the front of the valve simplifying installation requirements. In addition, the valve can be mounted at any angle and rotated 360°.

### Intuitive Insight Software


The AVT4000 also incorporates a simple and intuitive graphical user interface which enables the user to configure the valve for their specific requirements. Accutrol's Insight software, provided free of charge, insures that the owner is not required to contact the manufacturer of the airflow control system when changes are required in the field.

### BACnet® Option

The optional BACnet® MS/TP allows direct communication to the Building Automation System (BAS) where desired.

### Bluetooth® Configuration Option

The AVT4000 is available with a Bluetooth® configuration option, which alleviates the requirement for a USB connector when accessing the airflow valve via Accutrol's Insight graphical user interface software.

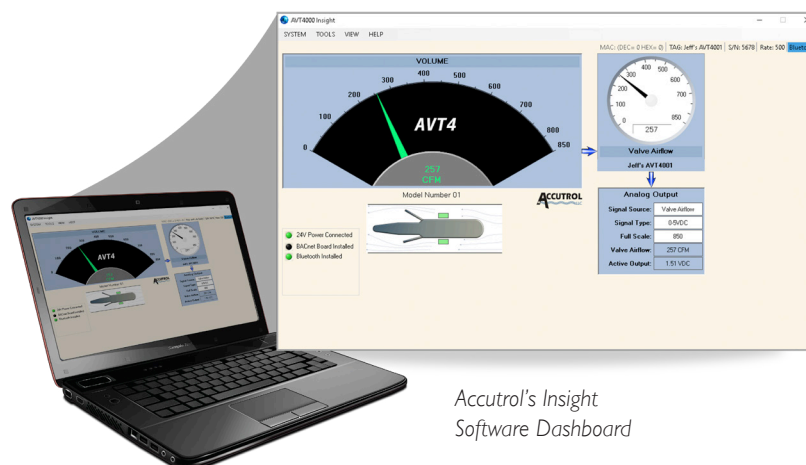

Accutrol's Insight  
Software Dashboard

## Operating Pressure Selector

Valve Size (mm)	Eng Units	Airflow Range							
		Minimum	Maximum Design Airflow						Maximum
6" (152)	CFM	30	99	143	174	206	230	254	315
	L/S	14	47	67	82	97	108	120	149
	CMH	51	168	243	296	350	391	432	535
8" (203)	CFM	80	252	367	447	528	589	650	800
	L/S	38	119	173	211	249	278	307	378
	CMH	136	428	624	760	897	1000	1104	1359
10" (254)	CFM	120	428	606	733	860	958	1056	1300
	L/S	57	202	286	346	406	452	498	614
	CMH	204	727	1030	1245	1461	1627	1794	2209
12" (305)	CFM	180	591	840	1016	1192	1326	1461	1790
	L/S	85	279	396	479	563	626	690	845
	CMH	306	1004	1427	1726	2025	2253	2482	3041
14" (356)	CFM	250	979	1364	1624	1884	2079	2275	2750
	L/S	118	462	644	766	889	981	1074	1298
	CMH	425	1663	2317	2759	3201	3533	3865	4672
12"x18" (305x457)	CFM	260	1003	1437	1761	2086	2341	2596	3200
	L/S	123	473	678	831	984	1104	1225	1510
	CMH	442	1704	2441	2992	3544	3977	4411	5437
12"x24" (305x610)	CFM	350	1261	1812	2213	2614	2925	3237	4000
	L/S	165	595	855	1044	1234	1381	1528	1888
	CMH	595	2142	3079	3760	4441	4970	5500	6796
Operating Pressure	"W.C.	< 0.01	0.05	0.1	0.15	0.2	0.25	0.3	0.45
	Pa	< 2.5	12.5	25	37.5	50	62.5	75	112.5



\* Minimum operating pressure when tested in accordance with ANSI/ASHRAE 130-2008

**For further assistance in making your AccuValve selections, please refer to the AccuValve Selection Guide for Operating Pressure. An AccuValve selection tool for iPhone, iPad and Android devices is also available to assist with AccuValve selections.**

## Specifications

### ACTUATOR ELECTRICAL

Please reference the following Actuator Submittal documents:

**Actuator** 24VAC/DC, 11 VA/6W  
#20-0052 (Standard-Speed FLP 2-10V)

### TRANSMITTER ELECTRICAL

**Input Power** 24VAC  $\pm$ 20% 50/60Hz, 6 VA  
24VDC  $\pm$ 10%, 3 W

**Output Signal** Software configurable  
0-20mA, 4-20mA, 0-10v, 2-10v, 0-5v or 1-5v

**Electromagnetic Compatibility** 2014/30/EU, EMC Directive  
EN61236-1:2013  
2014/53/EU, Radio Equipment Directive  
EN301489-1, V1.9.2:2011  
ETSI EN301489-1, V2.2.0:2017  
ETSI EN301489-3, V1.6.1:2013/V2.1.1:2017  
ETSI EN301489-17, V2.2.1:2012/V3.2.0:2017

**Product Safety** 2014/35/EU, Low Voltage Directive  
EN61010-1:2010/A1:2019/AC:2019

### ELECTRICAL (COM & CONFIGURATION)

**Network Com Port I** EIA 485 2-wire BACnet MS/TP (optional)  
Galvanically isolated  
Data Rates 9600, 19200, 38400, 57600, 76800  
and 115200  
Software provided for setting the MAC address  
 $\frac{1}{2}$  Unit load receiver input impedance  
Network bias and EOL termination not provided  
within the AVT

**Configuration Port** USB 2.0, Isolated, "C" type connector  
Optional Bluetooth®

### PERFORMANCE

**Accuracy**  $\pm$ 5% of reading or 5 CFM (2 L/S; 8 CMH),  
whichever is greater

**Speed of Response** < 1 second

**Shut-off Leakage Rate @ 3"wc valve DP** Standard round valves  
(size 06 through 14) <1.5% FS max.  
Round valves with blade seals  
(size 08 through 14) <0.5% FS max.  
Standard rectangular valves  
(size 18 and 24) <2% FS max.  
Rectangular valves with blade seals  
(size 18 and 24) <1% FS max.

**Max. Operating Pressure** 3"wc differential pressure across valve

**Failure Mode** Fail Last Position

### ENVIRONMENTAL

**Temperature**  
Operating -20° to 165° F (-29° to 74° C)  
Storage -40° to 165° F (-40° to 74° C)

**Humidity** 0% to 90% non-condensing

### MATERIALS OF CONSTRUCTION

**Valve Housing** Aluminum (16 Gauge)  
304SS (20 Gauge)  
316SS (20 Gauge)

**Shafts** 316SS

**Shaft Bearings** Teflon®

**Seals** EPDM with aluminum valves  
Viton with stainless steel valves

**Airflow Sensors** Polycarbonate plastic, UL94-VO

## Ordering Guides

Please see the following page for Ordering Guides.

# AVT4000 AccuValve® Ordering Guide



**Valve Housing Material**

- 2 = 304SS, 20 Gauge
- 3 = 316SS, 20 Gauge
- 4 = Aluminum, 16 Gauge

**Size**

- 06 = 6" Diameter
- 08 = 8" Diameter
- 10 = 10" Diameter
- 12 = 12" Diameter
- 14 = 14" Diameter
- 18 = 12"h x 18"w
- 24 = 12"h x 24"w

**Options**

- Blank = No Options
- B = BACnet MS/TP
- F = Flanges
- I = Insulation
- S = Tight Shut-off\*
- W = Wireless Bluetooth® Configuration

\*Blade seals are standard on all 6" valves

**Actuator Type**

- 17 = Fail Last Position, 2-10v (standard speed)

Your representative is:

